


S.I.™ FEEDERS



The Leader In Feeders!

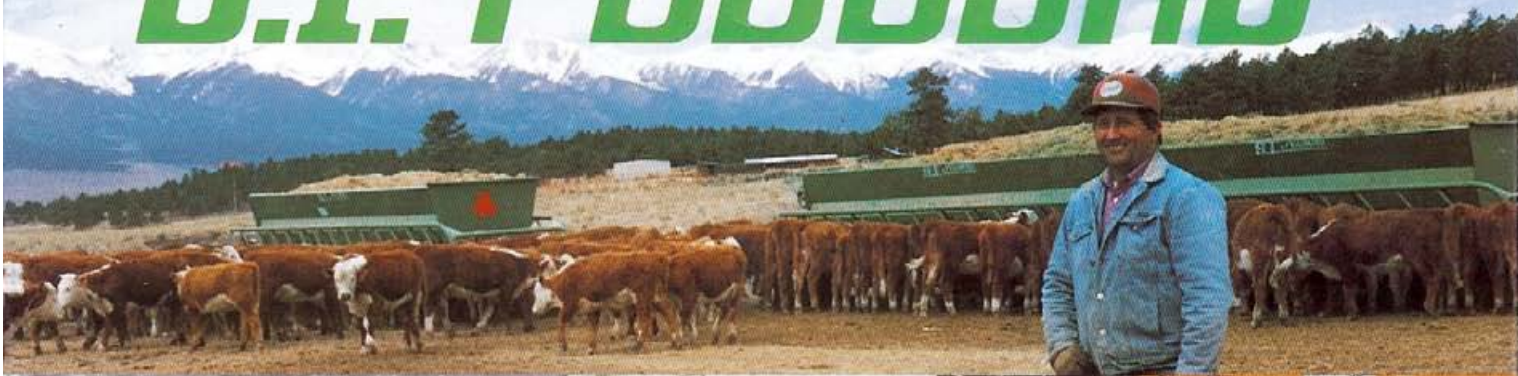

**HIGH STEEL INSERT
IN 20' ARROW FRONT® FEEDER**




Inserts are at an angle that allows feed to flow down without bridging and resists overflowing. **Adjustable height** of the inserts control the feed-flow of different types of feed. Inserts are **removable** when feeding round bales, to allow cattle to get at the total bale. Manger depth is ideal to prevent overflow and eliminate residual spoilage. 12 gauge rust resistant steel feed manger. **Rust and acid resistant green paint.**

High inserts are adjustable and hold about 25% more capacity than the low insert. They are used most commonly for chopped hay green chop, and feed that flows.



MIXER AND 36' ARROW FRONT® FEEDER WITH LOW INSERT

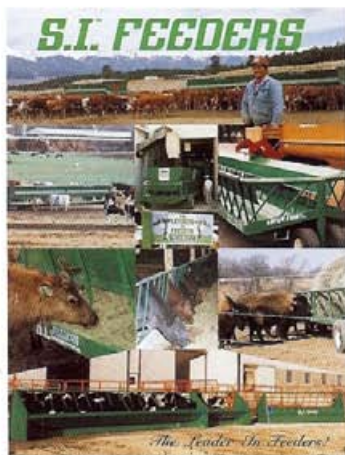

Cover pictures are:

- 24' and 36' low profile Arrow Front® feeders feeding calves chopped hay in **Colorado**.
- 36' Arrow Front® feeder with high insert feeding silage in **Florida**.
- 24' Arrow Front® feeder being filled with a partial mixed ration in **Missouri**.
- 36' Arrow Front® feeder ready for a total mixed ration in **Wisconsin**.
- The sign at a major farm show in **Kentucky**.
- 20' high capacity Arrow Front® Elk feeder feeding chopped hay in **Colorado**.
- 140' feeder sections finishing cattle in **Iowa**.
- 20' Arrow Front® Bison feeder feeding large round bales in **Wisconsin**.
- 20', 8', and 12' one sided Jr. bunks being installed in **Wisconsin**.

SINGLE AXLES are standard on all Arrow Front® feeders with a capacity of 8 ton on 12', 16', 20' and 24' Arrow Front® feeders and 10 ton capacity on 30' and 36' Arrow Front® feeders. **TANDEM AXLES** are optional on all wagon feeders for increased capacity, strength and floatation. 12, 16, 20 and 24 foot wagons become 12 ton capacity and 30 and 36 foot wagons become 15 ton capacity. The strength of the Arrow Front® design allows for a rear axle back which puts more weight on the front axle for safer towing and less problems on wet land. **2-way telescoping pole** for easier hook-up in long position at all times except when chopping. **Fifth-wheel type steering plate** provides a safe face and has a handy grease fitting. The Arrow Front® feeder is designed to feed all livestock for comfort and efficiency. **LOW PROFILE** feeders can be ordered for

ARROW FRONT® FEEDER

WITH DESIGN FEATURES TO FIT YOUR NEEDS

CONSIDER PASTURE LOT FEEDING. This approach makes dollars and sense, by using an area smaller than a pasture and larger than a feedlot. It reduces stress and provides a better environment for the cattle year around. An Arrow Front® feeder will take any type of feed to a clean area where it can be consumed with less waste and reduces the manure buildup. An extra advantage is that an electric powered stationary mixer, which costs less to buy and less to run, can be used for a partial or a total mixed ration. This approach requires less power, less concrete, and less manure handling.

THE ARROW FRONT® FEEDER WILL EFFICIENTLY FEED ALL TYPES OF FEED INCLUDING:

TOTAL MIXED RATIONS
PARTIAL MIXED RATIONS
GROUND FEED

SILAGE
HAYLAGE
BALEAGE

ROUND BALES
CHOPPED HAY
GREEN FEED

SQUARE BALES
big and small

ARROW FRONT® SPECIAL FEATURES

STRONGEST FRONT END

Superstrong front steering pipe is built into the feeder.
Slant bars form truss bracing.
Offset spindles create a caster steering angle for safer towing.

FEED SAVINGS

Functional slant bars save feed.
Deep manger retains feed.
Round tubing reduces bruising to livestock.
Feed saving edge saves grain and leaves.
Floor saving manger is tapered in, so feed will slide back and avoid accumulation.
Wide center peak channels feed for easy reach.
Inside bows control feed flow.

WAGON STRENGTH

Fully welded unibody construction.
Inside bows are **welded solid** to the floor.
Rounded rail for strength and safety.
Heavy one piece pan up to 20'.
High center peak provides major support.

EASIER CLEANING

Manger floor is flat on both sides of the center peak out to the bows for easier cleaning.

LARGER DRAINS


Larger drains allow unobstructed drainage.
Adjustable flaps offer self-cleaning, of unwanted feeds, by the sorting action of the livestock.

Schoessow®
THE LEADER IN FEEDERS
THE ORIGINATOR

OF THE FAMOUS LOW SET NARROW
FRONT, STEEL FEEDER



Slant bars form truss bracing for extra strength.

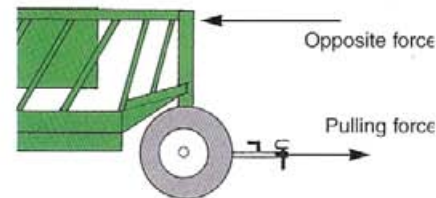

Front end strength is built into the entire feeder.



Since 1975

U.S. patent
#4,258,663
Canadian patent
#1,061,663 and
patents applied for.



LOW STEEL INSERT
IN 20' ARROW FRONT® FEEDER

Low inserts are easily installed and removed. They control the flow of silage, the feedout of square bales, both large and small, and can feed round bales up to 4' dia. The low insert is ideal for a TMR (Total Mixed Ration).




LARGE BALES IN A 30'
TANDEM AXLE ARROW FRONT® FEEDER



The **loop hem** at the base of the low insert helps to control the feed flow.

Wagon Size	Openings	Large Round Bale Cap.
12'	23	1-2
16'	29	2-3
20'	33	3-4
24'	39	4-5
30'	45	5-6
36'	53	6-8

* Bale capacity based on bales up to 5'3" long.

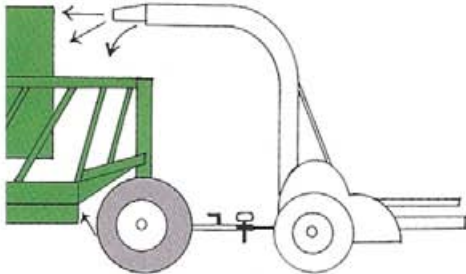

Front apron prevents mud from being spun onto feed. The apron also catches chopper drops.

SCHOESSOW, INC., in a continuing desire to improve, reserves the right to change or modify specifications without notice or obligation. All length and width measurements in this brochure are nominal.
Printed in USA © 1989 Schoessow, Inc.

SPECIALTY FEEDERS



Feeders can be specially made for a variety of needs. High and low profile designs, and various slant bar spacings accommodate most cattle. Feeders without slant bars are used for horned or antlered livestock. Rear hitches and high capacity needs can be made. Various spacing can be ordered to accommodate extremely large or small livestock.

FULL-SIZE BUNKS

FOR MATURE CATTLE



FULL-SIZE TRAILER BUNK

SEMI-STATIONARY BUNKS

PAN BUNK

Functional slant bars provide feed savings.
 Top of bunk is folded in and down for feed saving edge.
 Heavy steel pan is one piece for strength and economy.
 Adjustable legs are shaped to resist freeze down.
 Pan is shaped without corners to avoid waste.
 Telescoping pole, axle and tires make them portable.
4' WIDE for mature cattle.

5' long 12 openings
 10' long 20 openings
 15' long 26 openings
 20' long 32 openings

Bunks Patent #4,784,085



PAN BUNK END VIEW

MID-SIZE BUNKS

FOR FEEDER CALVES AND YOUNG STOCK



MID-SIZE TRAILER BUNK

SEMI-STATIONARY BUNKS

PAN BUNK

Same advantages as the full-size bunk above.
 Adjustable legs fit young stock at many sizes.
 Pole and axle kit is available.
3' WIDE for young stock and feeder calves.

10' long 20 openings
 15' long 28 openings
 20' long 36 openings



PAN TRAILER BUNK

MINI BUNKS

FOR CALVES AND SHEEP



Feeds calves up to 500 pounds.
 Great for inside pens or super hutches.
 Popular for sheep with feed savings and it is easily moved.
 Adjustable legs allow the bunk to grow with the calves.
2½' WIDTH feeds hay, grain and silage.

4' long 10 openings
 8' long 18 openings
 12' long 26 openings
 20' long 42 openings



FEEDER PANELS

FLOORLESS BUNKS

Feeds big bales and stacks with minimum waste.
 Can be used as fence-line or along hay storage areas.
 Hinges allow panels to diamond, but will not fold flat.
 Various lengths are interchangeable.

4' x 55" - 3 openings
 8' x 55" - 6 openings
 10' x 55" - 7 openings
 12' x 55" - 9 openings
 16' x 55" - 12 openings



SLANT BAR FEEDER SECTIONS

Attach to wood or concrete manger. 20' lengths standard. Shorter lengths made to order. Allow 9" per splice on multiple lengths.

ONE-SIDED BUNK



Designed for mature stock and feeder calves.
Use as a fence-line or loafing shed feeder.
Slant bars reduce tossed feed.
Feed saving edge both front and back.
Rigid kick panel for easy, quick cleaning.
End flanges allow for multiple length connections.
Just put the left end over the right.

10' long 7 openings
15' long 11 openings
20' long 14 openings



ONE-SIDED
BUNK END VIEW



ONE-SIDED JR. BUNK

Ideal for feeder calves, young stock and sheep.
Use as fence line feeder.
Rigid kick panel for easy cleaning.
Tapered high back provides feed savings.
Feed saving edge front and back of manger.
Use as a front for an inside pen.
End flanges allow for multiple length connections.
Just hook and swing together.

8' long Jr. 7 openings
12' long Jr. 11 openings
20' long Jr. 17 openings



ONE-SIDED
JR. BUNK END VIEW

S.I. FEEDERS

Div. of **Schoessow**, INC.

N5820 Johnson Road
Portage, Wisconsin 53901-9674
(608) 742-8851 FAX (608) 742-6666

For Your Nearest Dealer Contact:

Western Farm Sales
10864 88th ST SE
Oakes, ND 58474

Western Farm Sales - 800-635-3293