



*The "REEL" Efficient TMR mixer*



**WESTERN**  
FARM SALES, INC.

800-635-3293

10864 88th Street SE Oakes, ND 58474

westernfarmsales@gmail.com

FARM AID EQUIPMENT, INC., 40 EAST 1<sup>ST</sup> STREET, CORSICA, SD 57328

Phone (605) 946-5479 Fax (605) 946-5899 [www.farmaidmfg.com](http://www.farmaidmfg.com)







Standard Features, All

Extremely low horsepower usage

Low load

Standard Features, All

Low friction poly liners reduces fuel cost and increases life

Left or right discharge

Commercial Features

Hydraulic drive discharge conveyor

Ganged


**250**

**340**

180 Bu/254 Cu Ft

230 Bu/340 Cu Ft

	<b>250</b>	<b>340</b>
	180 Bu/254 Cu Ft	230 Bu/340 Cu Ft
<b>Loading height on trailer</b>	<b>6' 2"</b>	<b>6' 7"</b>
<b>Overall height</b>	<b>7' 9"</b>	<b>8' 2"</b>
<b>Reel size</b>	<b>5' 10" X 9'</b>	<b>5' 10" X 12'</b>
<b>Empty weight</b>	<b>5,900</b>	<b>6,700</b>
<b>Tongue weight (empty)</b>	<b>600</b>	<b>700</b>
<b>Overall length of mixing box and chain case</b>	<b>10' 9"</b>	<b>13' 9"</b>
<b>Overall length</b>	<b>14' 1"</b>	<b>18' 3"</b>
<b>Overall width tire to tire</b>	<b>7' 10"</b>	<b>7' 10"</b>
<b>Overall width with 5' elevator</b>	<b>9' 3"</b>	<b>9' 3"</b>

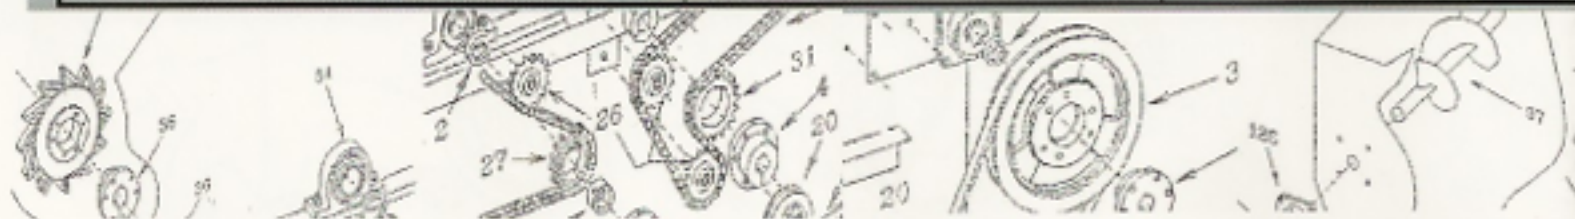





*The "REEL" Efficient TMR mixer*

ing height      Gentle tumbling action; less fines, less compacting

ight side      Sweep belting on Reel picks up small grains and  
e      cleans out mixer

grease zerks      All Chains in sealed oil baths for low maintenance

**Commercial**

**Commercial**

**430**

**560**


**680**

300 Bu/424 Cu Ft

390 Bu/560 Cu Ft

475 Bu/680 Cu Ft

6' 7"	7'	7' 5"
8' 2"	9' 8"	10'
5' 10" X 15'	6' 8" X 15'	7' 4" X 15'
8,100	12,600	13,400
820	1,300	1,400
16' 9"	17' 10"	17' 10"
21' 5"	22' 2"	22' 2"
8' 4"	8' 9"	10' 3"
9' 8"	10' 9"	11' 3"

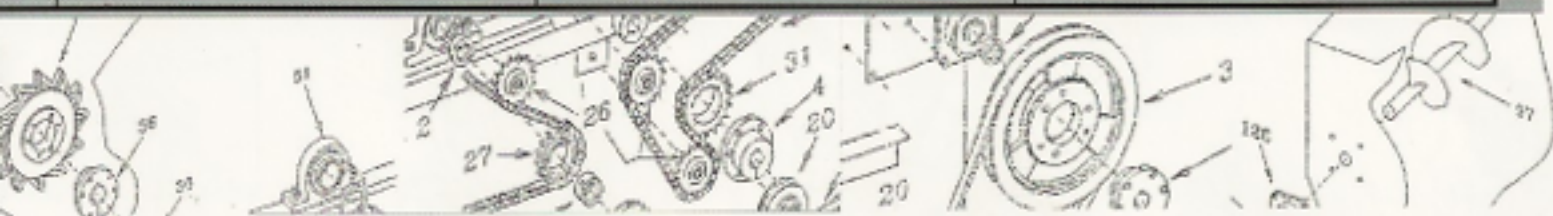





## Options:

- Right or left-hand discharge
- Choice of Weigh-Tronix or Digi-Star 4-point scale
- Wired or wireless remote displays
- Wireless zeroing switch
- Magnet kits for discharge shoot (shown on right for tramp metal collection)
- Discharge “hood” (shown on right)
- Bunk guards (middle picture for tire protection)
- Loader Bars (protects spiral)
- 1000 or 540 RPM PTO
- Stop, turn and tail lighting
- Tire options (shown on left, size and lug design)
- Discharge elevator length (5’ is standard, 3 or 4 are optional)
- CV PTO
- Stationary models
- Truck mounted models driven by a hydraulic pump on transmission PTO and an electronically operated valve

