


L.B. WHITE


Agricultural Heaters With Pilot Ignition

* The Standard of Quality for 40 Years *


Heaters You Can Count On!

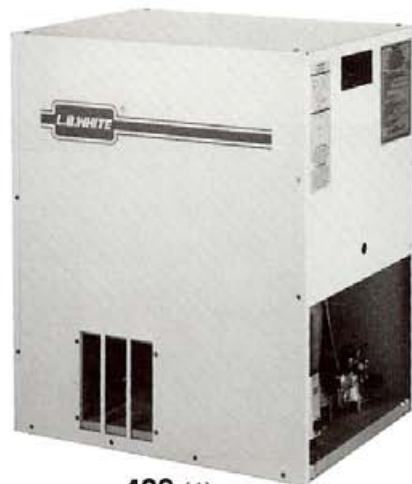

408 (1)

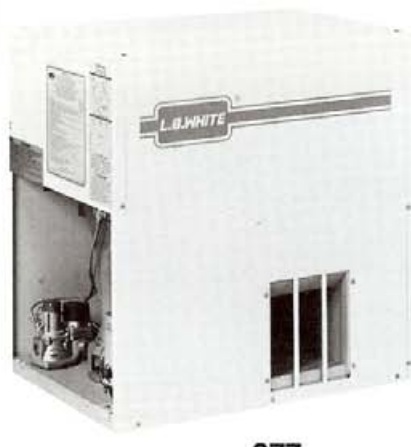

377

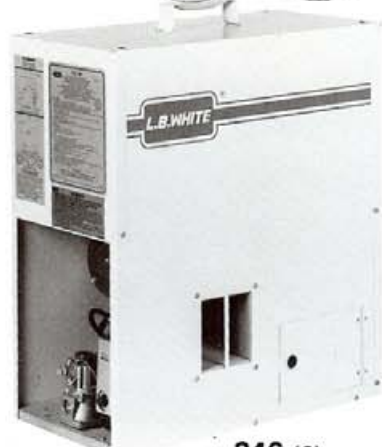

346 (2)

FEATURES

- **Pilot Light Ignition** — Simple and dependable operation.
- **"Tri-Shield" Paint System** — Excellent protection with three layers of protective finish.
- **Fully Protected Gas Valve** — Molded caps on solenoid and pilot protect from dust, dirt and moisture.
- **C.G.A./A.G.A. Design Certified** — Complies with applicable national standards as indicated below.
- **Eyebolt and Chain Mounting System** — Easy to install, all hardware included.
- **Internal Gas Pressure Tap** — Fast testing of supplied gas pressures.
- **Ten-Year Warranty (Standard)** — On rust through of case and combustion chamber.

(1) Certified under Canadian Gas Association.

(2) Certified under A.G.A. agricultural heater requirement 5-88 and Canadian Gas Association.

Nobody does it better than L.B. White!

L.B. WHITE®


W6636 L.B. White Road

Onalaska, WI 54650 USA

608/783-5691

*Nobody
does it better*


And that's not all . . . Check out these features:

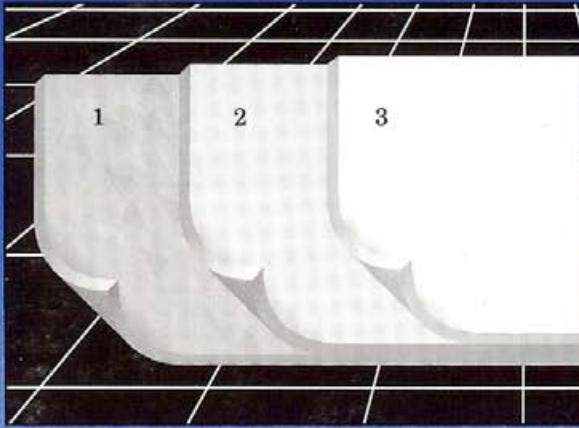

"Tri-Shield" Paint System

Three Layers of protection:

1. Non-corrosive hot-dipped galvanized steel.
2. Oven-cured epoxy primer.
3. Tough baked "thermo-setting" polyester top coat.

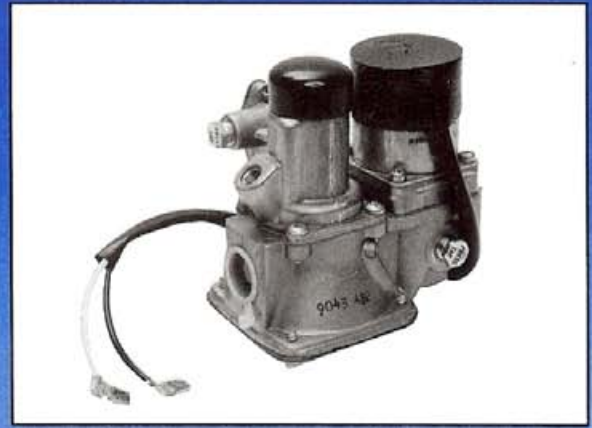

Protective Gas Valve

Molded caps protect valve from moisture, dirt and dust while allowing ease of service.

SPECIFICATIONS

MODEL	346	348	377	379	408	410
Style	Side Draw Air Inlet					
Application	Indoor Mount Only					
Fuel	Propane	Natural Gas	Propane	Natural Gas	Propane	Natural Gas
Capacity (Btuh)	60,000		115,000		170,000	
Fuel Consumption	2.78 lbs./hr.	60 cu. ft./hr.	5.33 lbs./hr.	115 cu. ft./hr.	7.79 lbs./hr.	170 cu. ft./hr.
Air Output (Heated) CFM	250		600		760	
Electrical	115/60/1					
Motor Amp Draw	3 Amps					
Totally Enclosed Motor w/Overload Protector	Standard					
High Temperature Limit Switch	Standard					
Gas Hose— 10 ft.	Standard 1/4 in. I.D.	Standard 1/2 in. I.D.				
Stainless Steel Thermostat	Standard					
Gas Regulator	Standard					
Gas Regulator Operating Pressure	11 in. W.C.	3.4 in. W.C.	11 in. W.C.	4.0 in. W.C.	11 in. W.C.	4.0 in. W.C.
Power Cord — 5 ft.	Standard					
Manual Gas Cock	Standard					
Dimension — L x W x H (Inches)	21 1/4 x 11 1/4 x 24		23 x 16 1/2 x 24		24 x 19 x 30	
Net Weight (lbs.)	55		90		111	
Shipping Weight (lbs.)	61		100		129	